
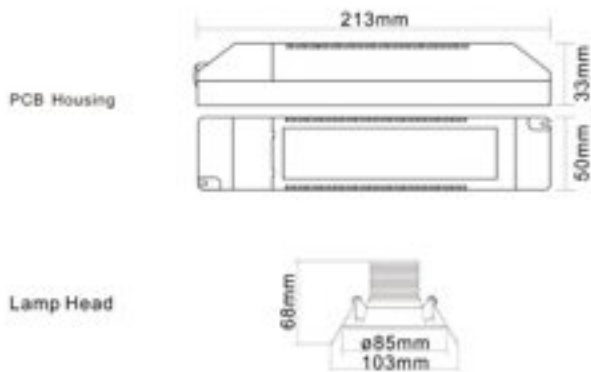
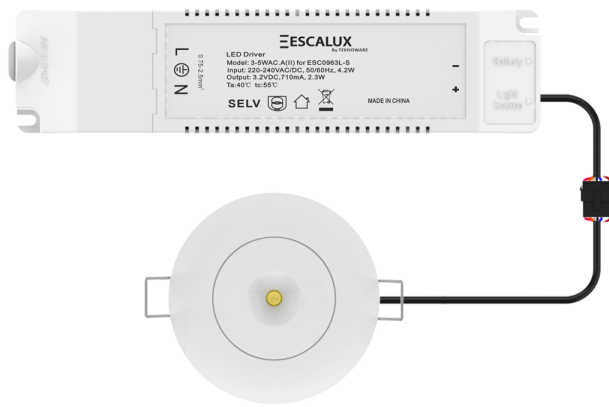



ESC0963L-S Emergency Luminaires



Key Features

Certified to CE Norms
Polycarbonate body and Aluminium Lamp Head
Uses highly active LED light source
High brightness and long life
Economical, Reliable and Safe
Easy to install and maintain
Rated to IP20
Ceiling Recess Mount
Ideal for Residences & Commercial Complexes

Technical Details

Supply Voltage	220-240V AC/DC; 50-60Hz
Input Wattage	4.2W
Emergency Mode	Slave - Central Battery Supplied Luminaire with Teknoware addressable module
Light Source	LED
Color Temperature	6000K
Operating Temperature	0° to 40° C
Material	Polycarbonate Body and Aluminium Lamp Head
Dimensions (mm)	PCB: Ø 213 X 50 X 33 Battery: Ø 33 X 180 Lamp Head: Ø 85 X 68
Lumen Output	280lm