



TWX8851WK | TWX8856WK

Linespot II Midbay Emergency Lighting



Check Youtube for installation video



SYSTEM DESCRIPTION:



Linespot II Midbay is a surface-mounted emergency light, especially designed for lighting 3-10 meter high areas. The high output version, TWX8856WK is suitable for up to 16 m installation height.


Linespot II Midbay uses the latest LED technology. Its optics is designed to give a long and narrow light pattern that illuminates corridors and escape routes efficiently.

Linespot II is also suitable for damp locations and is easy and fast to install thanks to a separate mounting base, which is also connected to the power supply.

KEY FEATURES:

- Designed for high area installation
- Optics designed to provide long and narrow light pattern
- Ideally suited for corridors and escape routes
- Suitable for damp locations
- Easy and fast installation thanks to a separate mounting base

DIMENSIONS

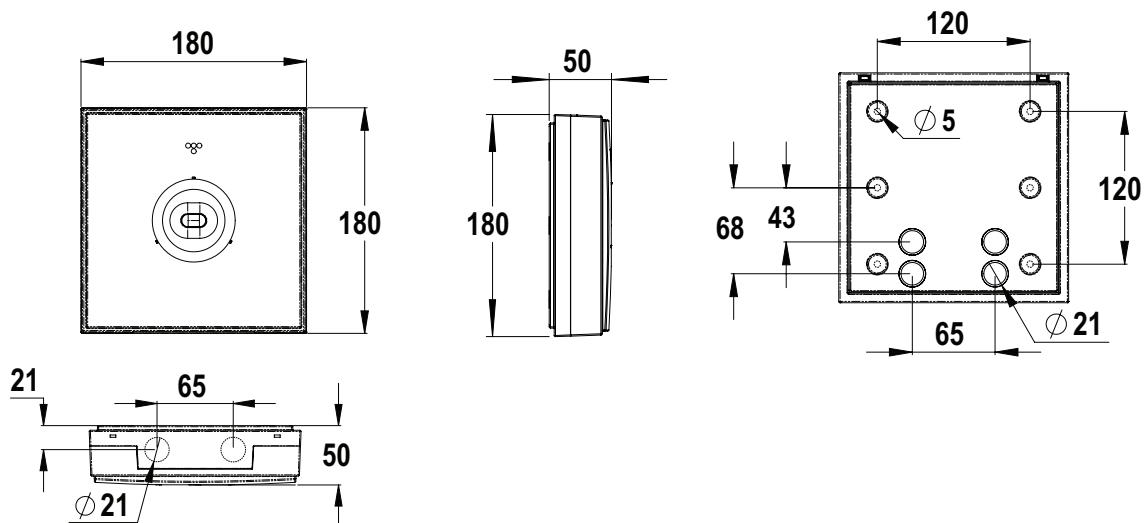

TWX8851WK | TWX8856WK


Linespot II Midbay Emergency Lighting

Product Code	Nominal Supply Voltage	Maximum Input Power	Luminous Flux (lm)	Operation Mode	Temperature Range	Electrical Installation	Weight (kg)
TWX8851WK	220-240V, 50/60 Hz AC/DC	10VA / 5.5W	240	CBS / C +IC	-30...+50°C	3 x 2.5 mm ² -0-	0.5
TWX8856WK	220-240V, 50/60 Hz AC/DC	16VA / 9.5W	530 (High Output)	CBS / C +IC	-30...+50°C	3 x 2.5 mm ² -0-	0.5

LIGHT DISTRIBUTION TABLES

Emergency Lighting for escape routes (ceiling mounted)

- Table of 1 lux for escape routes in the middle line according to the norm EN1838
- Level of measurement 0.02m, measurement result with battery operation

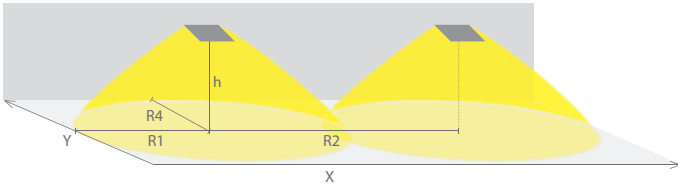

- R1 distance from wall (X axis)
- R2 installation distances between lights (X axis)
- R4 distance between from wall (Y axis)

ACCESSORIES


Product Code	Product Description
TW77504F	Suspension Bracket
TW77507B	Shock protecting cover (Dimensions X=320, Y=165, Z=305, A=340)

TWX8851WK


Mounting Height (m)	Below the Light (lux)	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
3	31	5	11	1
4	17	6.5	15	1
6	7	7	18	1
8	4	8	19	1
10	2	8	20	1

TWX8856WK

Mounting Height (m)	Below the Light (lux)	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
4	37	6.5	15	1
6	16	7	18	1
8	9	8	19	1
10	6	8	20	1
12	4	10	22	1
14	2.5	9.5	20	1
16	1.5	8.5	18	1

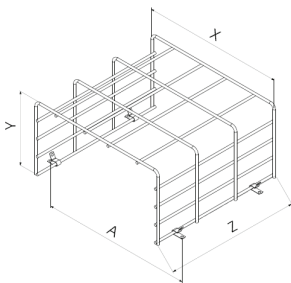

Shock Protecting Cover
TW77507B

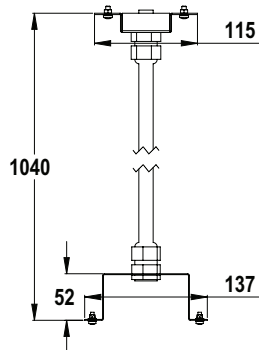

Suspension Bracket
TW77504F