


TWX3151WK

SOLID LED Emergency Exit Light






SYSTEM DESCRIPTION:

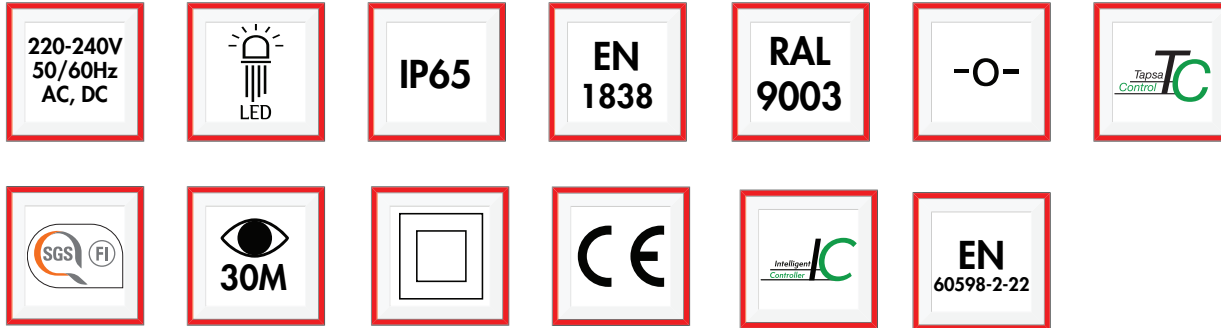

SOLID is our new emergency light and exit light product family, with an IP65 protection rating, specially developed for demanding conditions. Fast and easy installation has been emphasized in its design. The luminaire is dust-proof and water resistant, and therefore suitable for e.g. in industrial buildings, parking halls and other damp or dusty conditions, as well as outdoors. Long-life LEDs are used as the light source. Wall mounted, single sided SOLID exit lights are equipped with easy-to-change pictograms, with a 30 m viewing distance.

The product line also has exit lights with a downlight function, which are suitable for installation e.g. above doors, as well as exit lights for ceiling mounting, with a double sided pictogram. SOLID emergency lights have been optimized for various installation heights, for illuminating open areas, as well as exit routes.

DIMENSIONS

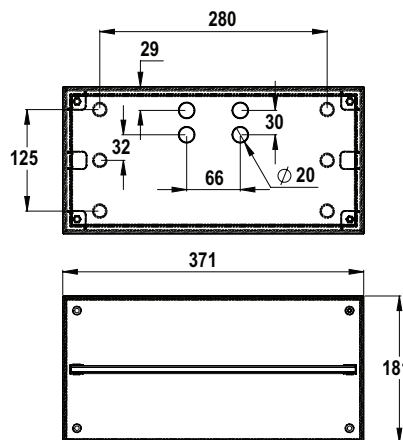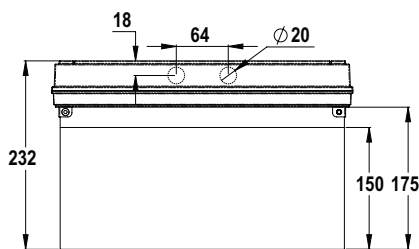







TWX3151WK

Central Battery System

Product Code	Nominal Supply Voltage	Max Input Voltage	Operation Mode	Temperature Range	Electrical Installation	Weight
TWX3151WK	220-240V 50/60Hz AC	10VA / 5.5W	CBS / C+IC	-30°..... +50°C	2/3 X 2.5mm ²	1.8

PICTOGRAMS

Product Code	Pictogram	Viewing Distance (m)	Copitable Product Group
PBV31302E	 	30	Solid Emergency Exit Lights
PBV31301E	 	30	Solid Emergency Exit Lights
PBV31305E	 	30	Solid Emergency Exit Lights