


TWX3651WK SOLID One Midbay LED Emergency Light



SYSTEM DESCRIPTION:

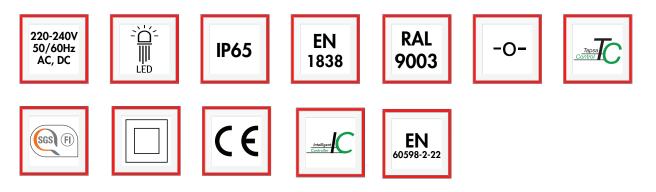

Designed for emergency lighting in open areas, SOLID Zone Midbay is an emergency light with a IP65 enclosure.

The luminaire is completely dust proof and water proof, so it is suitable for example for industrial premises and parking halls. ESCAP and centrally supplied luminaires are also suitable for outdoor use.

The SOLID luminaire uses long lasting leds as its light source. Special attention has been paid to the design, for easy installation.

KEY FEATURES

- Rated to IP65 suitable for industrial premises and parking lots •
- Complies to CE and EN60598-2-22 Standards •
- Protection class of luminaire is 2 •
- Luminaire suitable for through wiring
- Easy and quick installation •
- Uses long lasting LEDs as light source •

371 280 300 66 64 0 Ø**2**0 18 _ Ø 20 Q_____ 0 0 ⊘ G 57 €) 181 150 32 0 125 C 0 0

Product Code	Nominal Supply Voltage	Max Input Voltage	Luminous Flux (Im)	Operation Mode	Temperature Range	Electrical Installation	Weight
TWX3651WK	220-240V 50/60Hz AC	14VA / 8.5W	600	CBS / C+IC	-30°C +50°C	2/3 X 2.5mm ²	1.1



At Teknoware Oy, we follow a policy of continous improvement, product design and specifications are subject to change without notice.

For further information, please contact: Teknoware ME FZCO, Office 601, 4WA, DAFZA, United Arab Emirates, Tel.: +971 4 299 3622 | Fax.: + 971 4 299 3623 | www.teknoware.ae Teknoware Oy, PO Box 19, 1501 Lahti, Ilmarisentie 8, 15200 Lahti, Finland. Tel.: +358 3 883 020 | Fax.: +358 3 883 0240 | www.teknoware.com


DIMENSIONS



TWX3651WK SOLID One Midbay LED Emergency Light

Emergency Lighting for escape routes (ceiling mounted)

- Table of 0.5 lux for open areas according to the norm EN1838. 0.5m edge district is considered in this table.
- Level of measurement 0.02m, measurement result with battery operation.

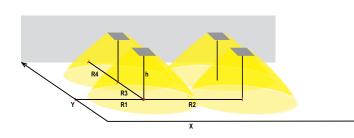


- R1 distance from wall (X Axis)
- R2 installation distance between lights (X Axis)
- R3 installation distance between lights (Y Axis)
- R4 distance from wall (Y Axis)


ACCESSORIES

TWX3651WK


Mounting height (m)	Below the light (lux)	R1 (m)	R2 (m)	R3(m)	R4 (m)
		0.5 lux	0.5 lux	0.5 lux	0.5 lux
4	25	5.5	10	10	5.5
6	11	6.5	12	12	6.5
8	6	7.5	14	14	7.5
10	4	7,5	14	14	7.5
12	2.5	8	15	15	8
14	2	8.5	16	16	8.5
16	1.5	8.5	16	16	8.5




Recess Mounting Frame TWT3001



Flag Mounting withWall Bracket TWT3004



Wall Mounting with Wall Bracket TWT3002



Flag Mounting with Flag Bracket TWT3003

Product Code	Product Description
TWT3001	Recess Mounting Frame
TWT3002	Wall Bracket
TWT3003	Flag Bracket
TWT3004	Ceiling Bracket



At Teknoware Oy, we follow a policy of continous improvement, product design and specifications are subject to change without notice.

For further information, please contact: Teknoware ME FZCO, Office 601, 4WA, DAFZA, United Arab Emirates, Tel.: +971 4 299 3622 | Fax.: + 971 4 299 3623 | www.teknoware.ae Teknoware Oy, PO Box 19, 1501 Lahti, Ilmarisentie 8, 15200 Lahti, Finland. Tel.: +358 3 883 020 | Fax.: +358 3 883 0240 | www.teknoware.com