


ROBUST 95 LED EMERGENCY LIGHT TWT9551WK



Addressable 230 V centrally supplied LED emergency light

Robust 95 is a LED emergency light for surface mounting to the wall. It has an especially robust design and a metal body.


With their high IP class and a very rugged construction, the luminaires are suitable for demanding environments, such as damp locations, industry and tunnels.

Product Code	TWT9551WK
Feature	Tapsa Control
Mounting (standard)	surface
Customs Code	94056080
GTIN Code	6438045022963
ETIM Product Class	EC001957
Length	304 mm
Width	126 mm
Height	126 mm
Weight	1,3 kg
Max Input Power VA	10 VA
Max Input Power W	5,5 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP67
Temperature Range Min - Max	-30...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Light Source	LED
Body Material	metal
Electrical Installation	3 x 2,5 mm ²
Luminous Flux	160 lm

Emergency lighting for escape routes (wall mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

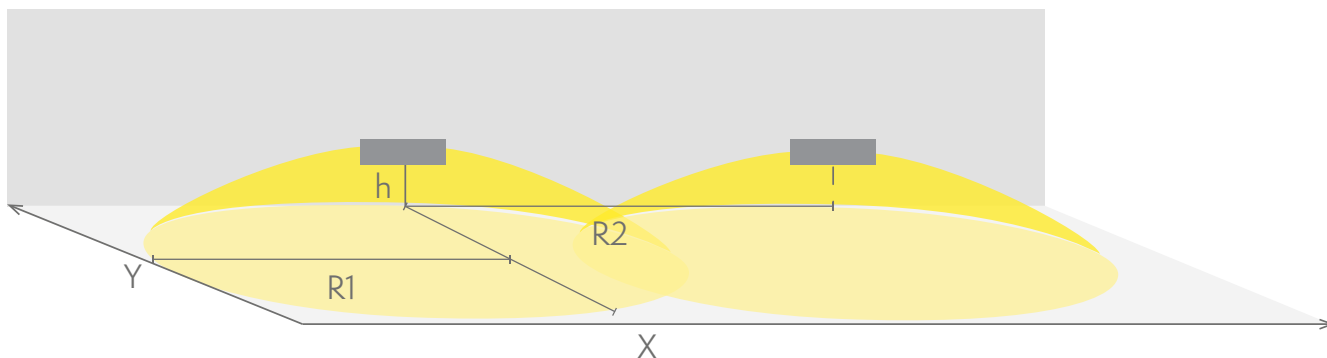

R1 distance from wall (X axis)
 R2 installation distance between lights (X axis)
TWT9551WK




Mounting height (m)	Below the light lux	R1 (m)	R2 (m)
		1 lux	1 lux
0,625	100	3,5	8

SPARE PARTS:

SPARE PARTS FOR EMERGENCY LIGHTS



Product Code	Product Name	Compatible Product Groups
W100006	Ballast W100006	Addressable 230 V Centrally Supplied Emergency Exit Lights, Addressable 230 V Centrally Supplied Emergency Lights

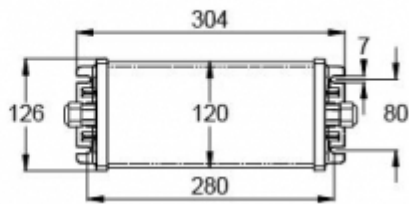

We reserve the rights to make modifications without notice.
Copyright © 2024 Teknoware. All rights reserved.
Date: January 12, 2024 | Source:
www.teknoware.com/en/emergency-lighting/robust-95-led-emergency-light-twt9551wk

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

