


STEP EMERGENCY LIGHT TWT1651WK



Addressable 230 V centrally supplied LED emergency light


Stylish and inconspicuous, the Step emergency light is specifically designed for use on stairs and other areas where luminaires are to be installed close to the floor. This luminaire is well suited to, for example, theatres and hospitals, where there is a specific need to keep emergency lighting close to the floor.

Product Code	TWT1651WK
Feature	Intelligent Controller, Tapsa Control
Customs Code	94056080
GTIN Code	6438045023120
ETIM Product Class	EC001957
Length	80 mm
Width	200 mm
Height	100 mm
Weight	0.8 kg
Max Input Power VA	10 VA
Max Input Power W	5,5 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-30...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Light Source	LED
Aperture for Recess Mounting	170 x 82 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm ²
Luminous Flux	110 lm

Emergency lighting for escape routes (wall mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

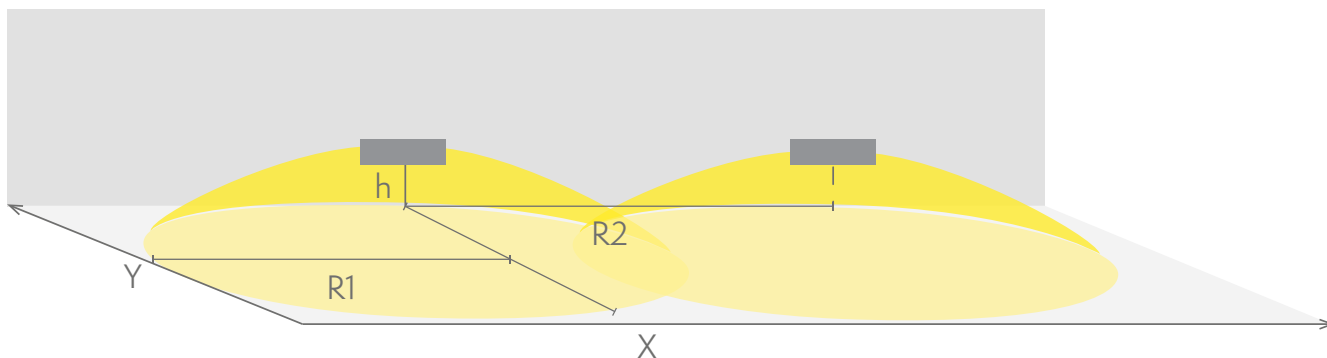


R1 distance from wall (X axis)
 R2 installation distance between lights (X axis)
TWT1651WK

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)
		1 lux	1 lux
0,3	250	1.5	4

OPTIONAL ACCESSORIES:

OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY LIGHTS

Product Code	Product Name	Compatible Product Groups
TWT1601	Step recess mounting housing TWT1601	

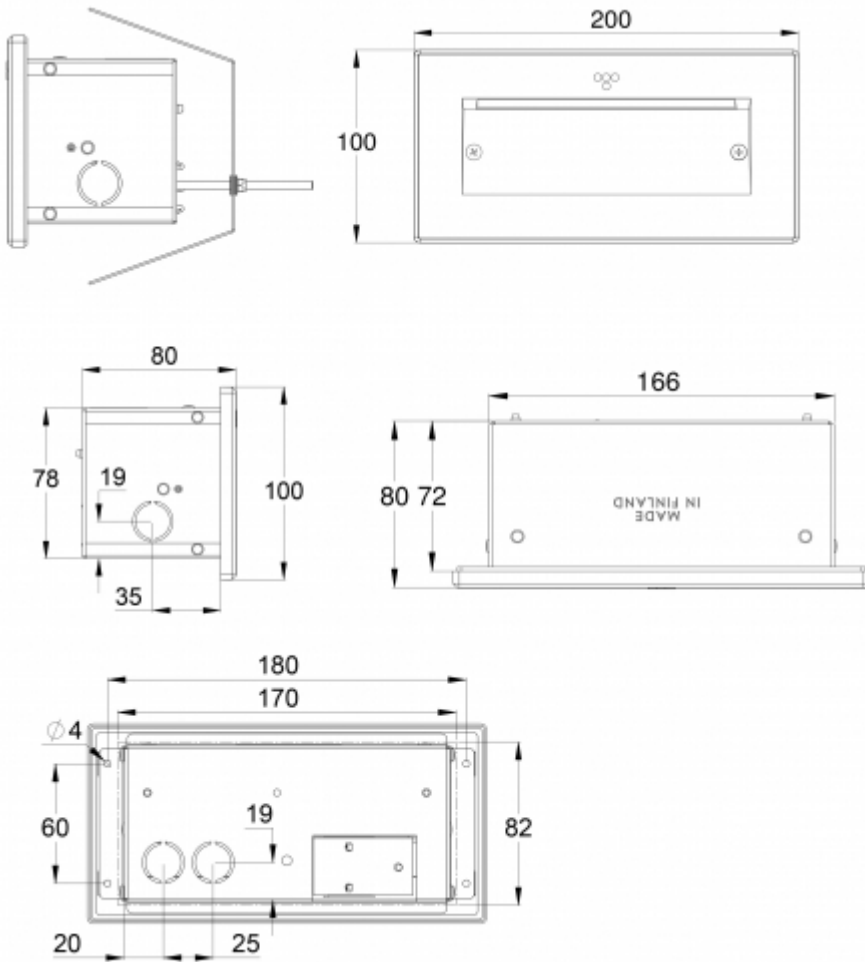

We reserve the rights to make modifications without notice.
 Copyright © 2024 Teknoware. All rights reserved.
 Date: January 12, 2024 | Source:
www.teknoware.com/en/emergency-lighting/step-emergency-light-twt1651wk

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
 Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

