



LIOR ESC0913L-M

Supply Voltage	220-240VAC 50/60Hz
Wattage	3W
Battery Specifications	3.6V 0.8Ah Ni-Cad Battery
Light Source	15 pcs LED
Emergency Time	3 hours
Charging Time	24 hours
Emergency Mode	Maintained
Operating Temperature	0°-40°C
Mounting Options	Wall Mount/Ceiling Mount/ Recess Mount
Viewing Distance	30m
Color Temperature	6000K
IP Rating	IP20
Material	Polycarbonate body and double sided edge lit acrylic legend
Product dimensions (In mm)	344x42x237



IP 20



Light Source
LED



TUV
Rheinland
Certified



Recycle as
appropriate



0°-40°C



3 hours

Key Features:

- Polycarbonate body and double sided edge lit acrylic legend
- Uses highly active LED light source
- Long life
- Easy installation and maintenance
- Rated to IP20

Ordering Codes:


ESC0913L-NM -
Exit luminaire, Wall/Ceiling Mount

Accessories:

- Recess bracket frame
- Flag bracket
- Pictograms:
 - ▶ Right arrow
 - ▶ Left arrow
 - ▶ Down arrow
 - ▶ Right/Left (double sided) arrow



Product Size: (L X W X H)

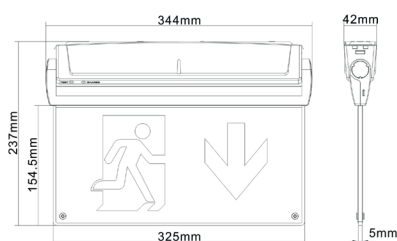

Specifications are subject to change without notice.

For further information, please contact:

Teknoware Middle East FZCO,

#601, 4WA, DAFZA, Dubai, United Arab Emirates.

Tel.: +971 4 299 3622 | Fax.: + 971 4 299 3623 | info@teknoware.ae