


XST2503 Control module

- Linux based module with 7" touchscreen
- 3 indicator LEDs
- Master module in internal data bus
- Stores all the data to DB
 - Module configuration
 - Test history & luminaire configuration
 - Settings
- Provides ACM, WebACM & MyTeknoware interface

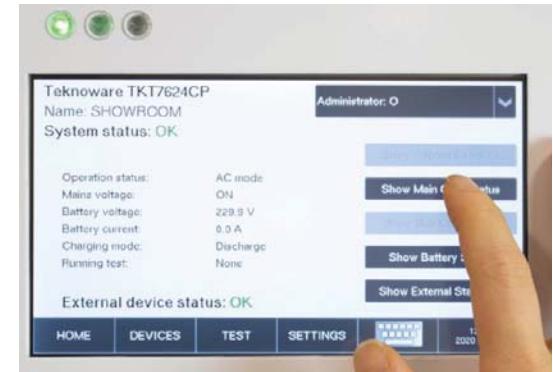

Green LED lit: Mains present, central battery unit in mains mode (AC)

Green LED blinking: Mains present, central battery unit in battery mode (DC), for example during the battery test

Yellow LED lit: Central battery unit in battery mode (DC)

Red LED lit: Internal / external error

XST2503 Control module

- Full CBU backup to/from USB stick
- Ethernet connection for WebACM and MyTeknoware
- CAN-bus to Eltek charger
 - Battery settings from GUI
- Controls the CBU logic
 - Tests
 - Battery charging
 - Voltage monitoring of mains and battery
- Software update from USB stick

