
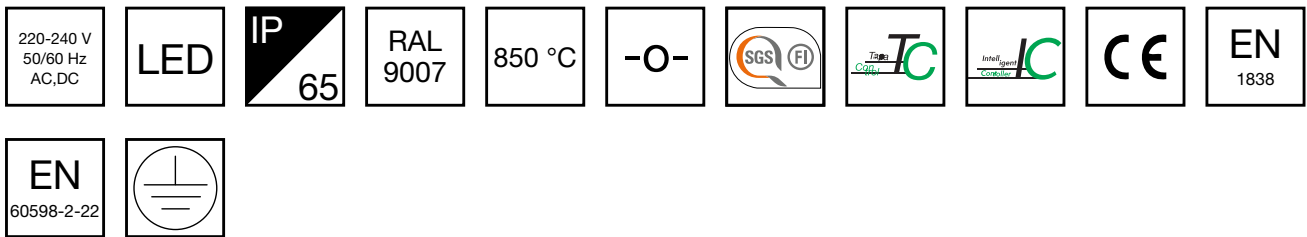


# STAMINA ZONE HIGHOUTPUT EMERGENCY LIGHT TWT5751WKH

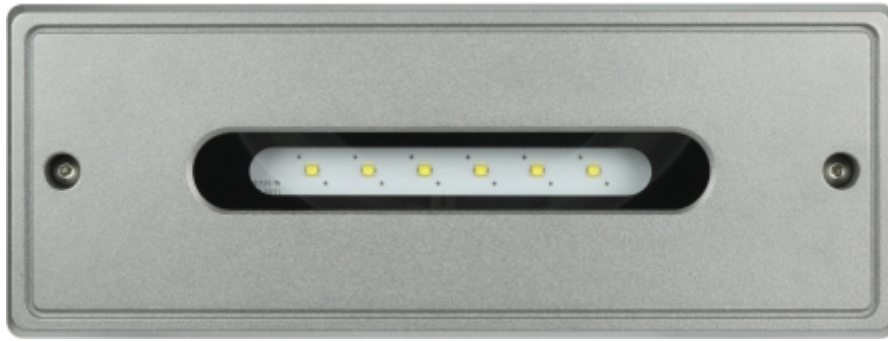

## Addressable 230 V centrally supplied LED emergency light

The Stamina Zone Highoutput TWT5751WKH is designed to meet the highest demands in challenging environments.

The luminaire has an impact resistant IK10 metal body and it is dust- and waterproof (IP65). This model can be used in freezing temperatures up to -30°C. The Stamina has several mounting options. This model is equipped with optics that enables the luminaire to be installed up to 20 meters to illuminate wide open areas.

We reserve the rights to make modifications without notice.  
Copyright © 2024 Teknoware. All rights reserved.  
Date: January 12, 2024 | Source:  
[www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw5751wkh](http://www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw5751wkh)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

Product Code	TWT5751WKH
Feature	Intelligent Controller, Tapsa Control
Mounting (standard)	wall, ceiling
Customs Code	94056080
GTIN Code	6438045024547
ETIM Product Class	EC001957
Length	265 mm
Width	100 mm
Height	87 mm
Weight	1,2 kg
Max Input Power VA	33 VA
Max Input Power W	18 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC,DC
Protection Class	I
IP Class	IP65
IK Class	IK10
Temperature Range Min - Max	-30...+50 °C
Glow Wire Test of Plastic Materials	850 °C
Certifications	SGS Fimko
Light Source	LED
Body Material	cast aluminium
Colour	RAL9007
Electrical Installation	3 x 2,5 mm <sup>2</sup>
Luminous Flux	1110 lm

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.


Date: January 12, 2024 | Source:

[www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw5751wkh](http://www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw5751wkh)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

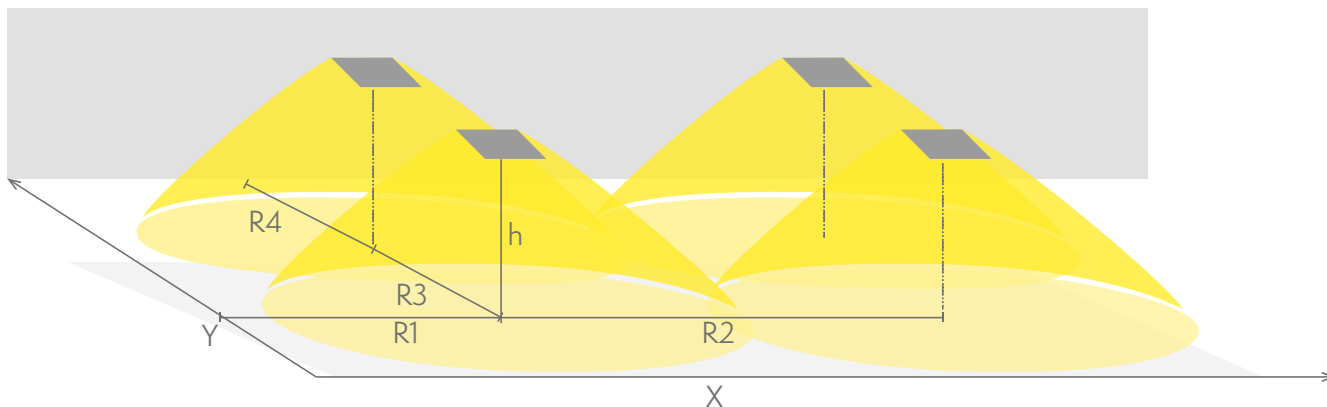

- R1 distance from wall (X axis)
- R2 installation distance between lights (X axis)
- R3 installation distance between lights (Y axis)
- R4 distance from wall (Y axis)

## TWT5751WKH

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
3	44	5	12	7	4
4	24	5,5	14	8,5	4,5
6	11	6	16	12	6
8	6,5	9	18	14	7
10	4,5	9,5	19	15	7,5
12	3	10	20	16	8
14	2	10	20	16	8
16	1,5	10	20	16	8
18	1,2	10	20	16	8
20	0,9	10	20	16	8

ONE OR MORE OF THESE IS ALSO REQUIRED:

## OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY LIGHTS

Product Code	Product Name	Compatible Product Groups
XWT5210	Stamina wall bracket XWT5210	Stamina: Zone, Stamina: Zone Highoutput, Stamina: Line Lowbay, Stamina: Line Midbay
XWT5211	Stamina ceiling bracket XWT5211	Stamina: Zone, Stamina: Zone Highoutput, Stamina: Line Lowbay, Easy: Combo Emergency / Exit Light

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: January 12, 2024 | Source:

[www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw5751wkh](http://www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw5751wkh)



## OPTIONAL ACCESSORIES:

### OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY LIGHTS

Product Code	Product Name	Compatible Product Groups
XWT5213	Stamina recess mounting frame XWT5213	Stamina: Zone, Stamina: Zone Highoutput, Stamina: Line Lowbay, Stamina: Line Midbay

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: January 12, 2024 | Source:

[www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw-t5751wkh](http://www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw-t5751wkh)






Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



We reserve the rights to make modifications without notice.  
Copyright © 2024 Teknoware. All rights reserved.  
Date: January 12, 2024 | Source:  
[www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw-t5751wkh](http://www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw-t5751wkh)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



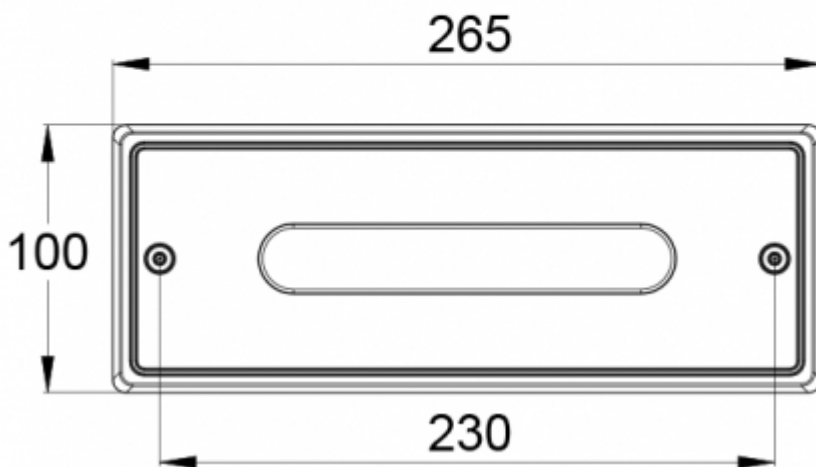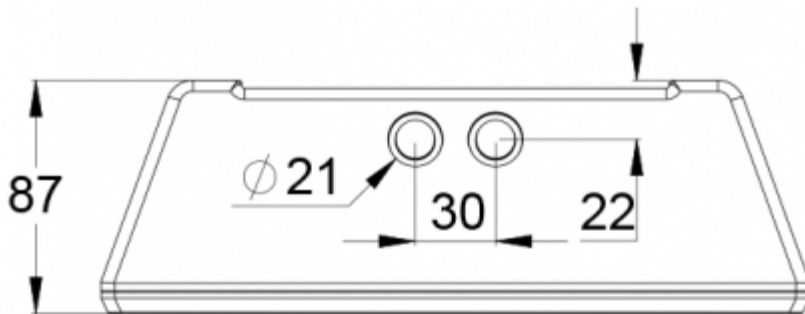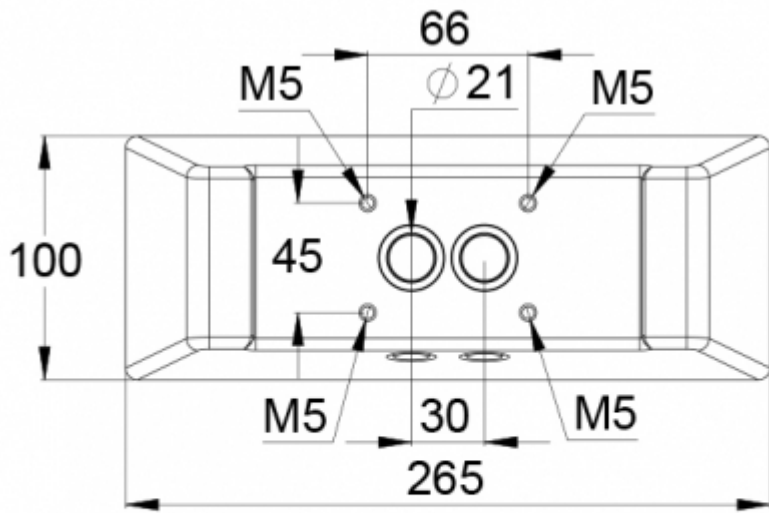

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: January 12, 2024 | Source:

[www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw-t5751wkh](http://www.teknoware.com/en/emergency-lighting-1/stamina-zone-highoutput-emergency-light-tw-t5751wkh)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)