SLIMSPOT II LINE LOWBAY EMERGENCY LIGHT TWTA151WK



























Addressable 230 V centrally supplied emergency light

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Line Lowbay provides a long and narrow pattern that illuminates escape routes efficiently.




| Product Code | TWTA151WK | | |
|-------------------------------------|---------------------------------------|--|--|
| Feature | Intelligent Controller, Tapsa Control | | |
| Mounting (standard) | recess | | |
| Customs Code | 94056080 | | |
| GTIN Code | 6438045024790 | | |
| ETIM Product Class | EC001957 | | |
| Length | 85 mm | | |
| Width | 85 mm | | |
| Height | 46 mm | | |
| Weight | 0,4 kg | | |
| Max Input Power VA | 10 VA | | |
| Max Input Power W | 5,5W | | |
| Nominal Supply Voltage | 220-240 V, 50/60 Hz AC, DC | | |
| Protection Class | I | | |
| IP Class | IP20 | | |
| Temperature Range Min - Max | -30+50 °C | | |
| Glow Wire Test of Plastic Materials | 650 °C | | |
| Light Source | LED | | |
| Body Material | metal | | |
| Aperture for Recess Mounting | ø75 mm | | |
| Colour | RAL9003 | | |
| Electrical Installation | 3 x 2,5 mm² | | |
| Luminous Flux | 250 lm | | |

Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.



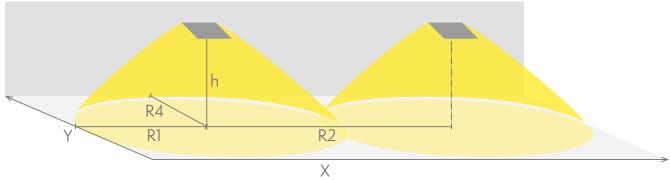

R1 distance from wall (X axis)
R2 installation distance between lights (X axis)
R4 distance from wall (Y axis)
TWTA151WK

| Mounting height (m) | Below the light lux | R1 (m) | R2 (m) | R4 (m) |
|---------------------|---------------------|--------|--------|--------|
| | | 1 lux | 1 lux | 1 lux |
| 2,5 | 7,5 | 9 | 21 | 1 |
| 4 | 3 | 10 | 28 | 1 |
| 6 | 1,5 | 9 | 22 | 1 |

